


50Ω Adapters 2.4mm Female - 2.4mm Female 90° Right Angle

Part Number: 24-FFW

Electrical Specifications at 25°C, all specifications are subject to change without notice at any time. Rev. A

Frequency Range	DC-50GHz
VSWR (Max.)	1.25:1
Insertion Loss (Max.)	0.6dB
Durability (Min.)	1000 Cycles
Insulation Resistance (Min.)	3000 MΩ
Operating Temperature	-65°C ~ +165°C
Body Material	Stainless Steel Passivated
Center Conductor	Brass&Beryllium Copper Gold Plated
Dielectric	PEI&PTFE

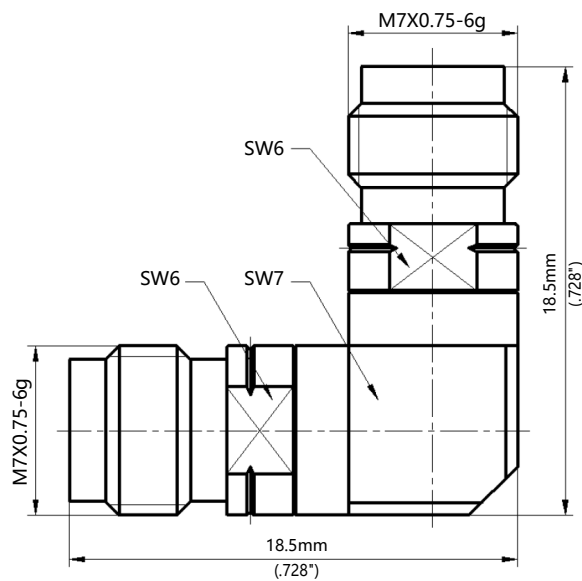

50Ω Adapters 2.4mm Female - 2.4mm Female 90° Right Angle

Part Number: 24-FFW

Electrical Specifications at 25°C, all specifications are subject to change without notice at any time. Rev. A

