


50Ω Adapters 2.92mm Male - 2.92mm Male

Part Number: 292-MM



Electrical Specifications at 25°C, all specifications are subject to change without notice at any time. Rev. A

| | |
|------------------------------|----------------------------|
| Frequency Range | DC-40GHz |
| VSWR (Max.) | 1.15:1 |
| Insertion Loss (Max.) | 0.3dB |
| Durability (Min.) | 1000 Cycles |
| Insulation Resistance (Min.) | 5000 MΩ |
| Operating Temperature | -65°C ~ +165°C |
| Body Material | Stainless Steel Passivated |
| Center Conductor | Brass Gold Plated |
| Dielectric | PEI |

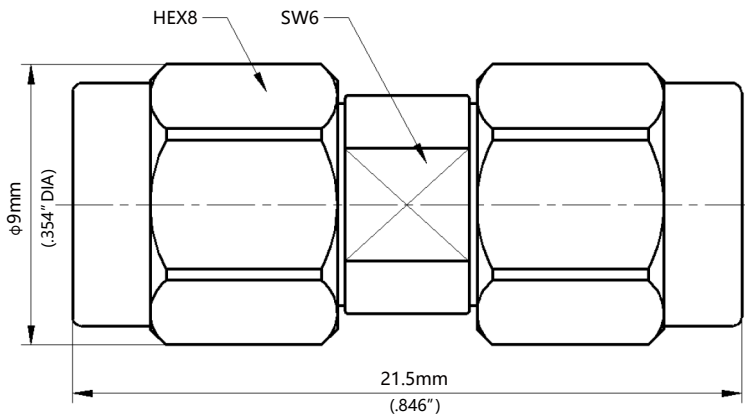

Electrical & Mechanical Specifications

2D Outline Drawing

50Ω Adapters 2.92mm Male - 2.92mm Male

Part Number: 292-MM



Electrical Specifications at 25°C, all specifications are subject to change without notice at any time. Rev. A

MiCable

Typical Graph

