

# Power Divider/Combiner

## Model P03N060180 Rev.C

6-18GHz 3-Way Power Divider/Combiner, Coaxial connector




### Specifications

All specifications are subject to change without notice at any time

Frequency Range	GHz	6-18	
Sum VSWR	:1 (Max.)	1.5	
Distri. VSWR	:1 (Max.)	1.5	
Insertion Loss <sup>1</sup>	dB(Max.)	1.2	
Amp. Unbalance	dB(Max.)	±0.5	
Phase Unbalance	Deg. (Max.)	±5	
Isolation	dB(Min.)	18	
Power <sup>2</sup>	W(Max.)	CW: FOR 30, REV 5; Peak: 3000	
Weight	g(Max.)	80	Dimension <sup>3</sup> mm (LxWxH) 38.1x43.2x12.7
Interface	Sum: SMA [F], Distri.: SMA [F]; Stainless steel connector, Per IEC 61169		
Finishing	Alloy iridite, Per MIL-DTL-5541F		
Temperature	Operating: -55~+85°C; Storage: -55~+100°C		
Environmental	Optional: Per MIL-STD-202F (contact supplier for detail info.)		
Eng. Customized	N/A		

- Note:
- Above Theoretical Loss 4.8dB
  - VSWR ≤ 1.2 required for forward CW; Amp. & phase unbalance required for reversed input signals
  - Unless otherwise specified, Decimal tolerance: x.±1; .x±0.5; .xx±0.1

### Outline Drawing

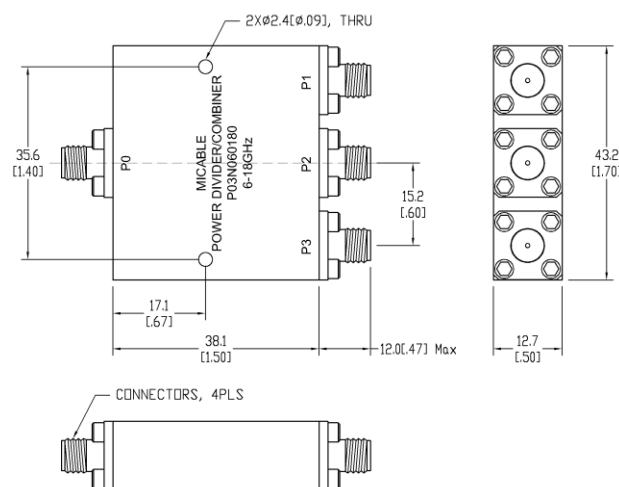

# Power Divider/Combiner

## Model P03N060180 Rev.C

6-18GHz 3-Way Power Divider/Combiner, Coaxial connector

### Typical Graph

@Ambient Temperature

