

Electrical Specifications at 25°C, all specifications are subject to change without notice at any time. Rev. A

Frequency Range	DC-33GHz
VSWR (Max.)	1.15:1
Insertion Loss (Max.)	0.25dB
Durability (Min.)	1000 Cycles
Insulation Resistance (Min.)	5000 ΜΩ
Operating Temperature	-65°C ∼+165°C
Body Material	Stainless Steel Passivated
Center Conductor	Beryllium Copper Gold Plated
Dielectric	PEI





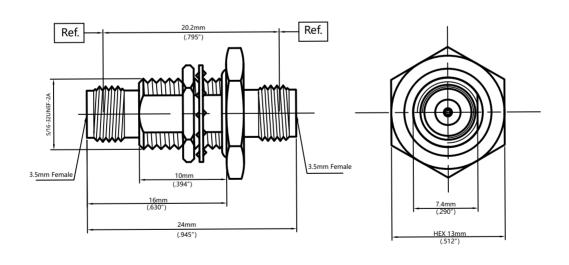



Electrical & Mechanical Specifications

## $50\Omega$ Adapters 3.5mm Female - 3.5mm Female Bulkhead

Part Number: 35-FFY

