

# B16 Series (SMA Male-ST to SMA Male-ST)

CXN3507, Cable Assembly, 50ohms, DC-26.5GHz



## B16-01-01-"L" (L: Length)

### Maximum Ratings

Operating Temperature -55°C to +85°C

Storage Temperature -55°C to +85°C

Permanent damage may occur if any of these limits are exceeded


Cable Diameter	3.60mm	
Velocity of Propagation	85%	
Shielding Effectiveness	>90dB	
Power Handling at 40°C	1 GHz	590W
	2 GHz	414W
	6 GHz	221W
	12 GHz	168W
	18 GHz	120W
	26.5 GHz	95W
Min. Bending Radius	25.4mm	

### Features

- Stainless steel connectors for long mating-cycle life
- High shielding effectiveness, >90dB
- Excellent phase stability over temperature, 500ppm@-55°C~+85°C
- Extremely low loss, low VSWR

### Applications


- Phase array radars
- Rack to rack connection
- RF/Microwave test systems
- Airborne, shipborne and ground systems

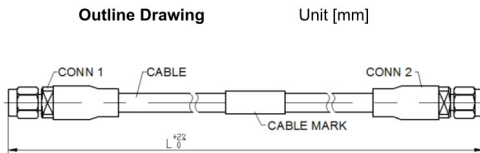

### Electrical Specifications at 25°C

Freq. (GHz)	Length (m)	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC - 6		6-12		12-18		18-26.5		DC - 6		6-12		12-18		18-26.5	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
DC-26.5	0.5	0.6	0.8	0.8	1.0	1.0	1.2	1.2	1.5	1.14	1.20	1.21	1.25	1.31	1.35	1.35	1.40
	1	1.0	1.2	1.5	1.7	1.8	2.1	2.4	2.7								
	1.5	1.4	1.6	2.2	2.4	2.7	3.0	3.3	3.6								

### Cable Cross Section

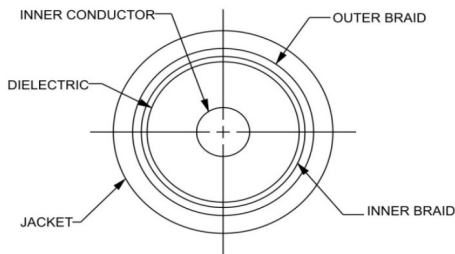

### Typical Performance Data (B16-40-40-1M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.05	0.05
1000	1.09	0.44
2000	1.11	0.62
4000	1.12	0.89
5000	1.13	0.99
6000	1.15	1.10
7000	1.17	1.18
8000	1.18	1.27
9000	1.19	1.35
10000	1.20	1.42
12000	1.21	1.53
15000	1.26	1.76
16000	1.29	1.82
18000	1.31	1.91
20000	1.33	2.06
26500	1.35	2.30

Cable Construction	
Inner Conductor	Solid Silver Plated Coppe
Dielectric	LD-PTFE
Inner Braid	Silver-Plated Copper Strip
Outer Braid	Silver-Plated Copper Braid
Jacket	PFA

Connectors	
• Nut, Stainless steel, Passivated	
• Body, Stainless steel, Passivated	
• Center contacts, Brass, Gold plated	
• Dielectric, PTFE, Natural	

### Product Guarantee\*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse

