


High Power Directional Coupler

Model D4008H004080 Rev.A

0.4-8GHz 40dB 400Watt Directional Coupler;




Specifications

All specifications are subject to change without notice at any time

Frequency Range	GHz	0.4-8
Main Line VSWR	:1 (Max.)	1.4
Coupling VSWR	:1 (Max.)	1.4
Insertion Loss ¹	dB(Max.)	0.7
Coupling	dB(Max.)	40±1
Flatness	dB(Max.)	±1.4
Directivity	dB(Min.)	14
Power ²	W(Max.)	CW: 400; Peak: 3000
Weight	g(Max.)	650
Dimension ³	mm (LxWxH)	187.5x30.0x43.4
Interface	Stainless steel connector; Input: TYPE N [F], Thru.: TYPE N [F], Coup.: SMA [F]	
Finishing	Nickel plating	
Temperature	Operating: -55~+85°C; Storage: -55~+100°C	
Environmental	Per MIL-STD-202F, Method 107D, 204D, 213B (optional, contact supplier for detail info.)	
Eng. Customized	N/A	

- Note:
1. Theoretical coupling loss included
 2. VSWR ≤ 1.2 required for CW
 3. Unless otherwise specified, Decimal tolerance: x.±1; .x±0.5; .xx±0.1

Outline Drawing

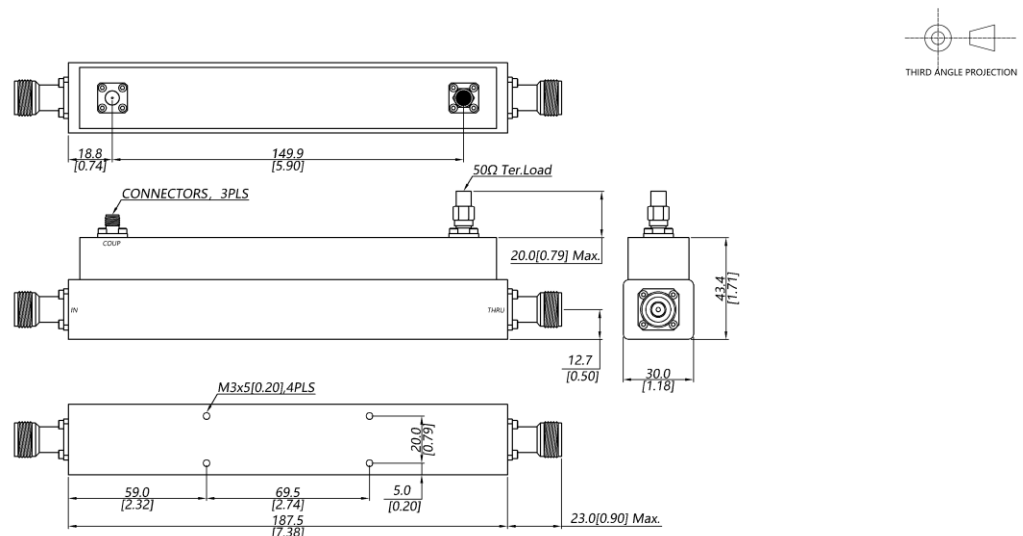

High Power Directional Coupler

Model D4008H004080 Rev.A

0.4-8GHz 40dB 400Watt Directional Coupler;

Typical Graph

Typical test temperature @25°C

