

◆ Product Description

The MPAR-009060S46 is a 0.9-6GHz, 40W solid state high gain broadband high power amplifier with state-of-art GaN design technology. It has higher saturated output power while keeping higher P1dB and better linearity, and can adapt to a variety of different signal modes such as continuous wave, pulse, wide instantaneous bandwidth signal, high-order modulation signal and etc. It is designed for applications, such as 5G/LTE, WIFI and other related system & EMC Test.

◆ Features

Frequency Range: 0.9-6GHz	Solid-state Class AB broadband design
Output Power.: 44.8dBm Min, 46dBm Typ.	High linearity, high efficiency
P1dB: 42dBm Min, 44dBm Typ.	Suitable for pulse or CW signals
50 ohm input/output impedance	Small and light weight
Built-in control, monitoring and protection circuits	High reliability and ruggedness

◆ Electrical Specification (T=25°C±3°C, VAC =220V, CW, Load VSWR<1.2)

Description	Min	Typ	Max	Unit
Operating Frequency	0.9		6	GHz
Output Power CW* @ Pin=0dBm	44.8	46		dBm
Output P1dB* CW	42	44		dBm
Gain @ Pin= 0dBm	44	46		dB
Gain Flatness @ Pin=0dBm		±1.5	±2	dB
2nd/3rd Harmonics @ Pin=0dBm		-20/-20	-12/-15	dBc
Spurious Signals @ Pin=0dBm		-70	-60	dBc
Small Signal Gain @ Pin= -30dBm		48		dB
Small Signal Flatness @ Pin= -30dBm		±4	±5	dB
Isolation (Disable Status)		90		dB
Input VSWR		1.5	2	/
Output VSWR		1.8		/
Gain Adjustment (On front panel)	15			dB
IMD3 2-Tone @ 34dBm/Tone, 10MHz**		-25	-22	dBc
Group Delay			15	nS
Supply Voltage (47~61Hz) /Single-Phase	180	220/50Hz	260	V
Power Consumption @ Pout =44~46dBm		260	340	W

Note*: Fundamental Power, Harmonics are excluded

Note**: 100MHz Data is Available, please contact sales for further information.

◆ Environmental Specifications (Design Goal)

Operation Temperature*1	-10	45	°C
Storage Temperature Range	-20	55	°C
Relative-Humidity		95	%
Altitude*2	N/A		
Vibration/Shock*2	N/A		

Notes *1: Operation Temperature can be extended to -40~65°C, Contact Sales for update.

Notes *2: Altitude /Vibration are designed with considerations, but without tests and experiments. Contact Sales for experimentally verified.

◆ Limits

Pin<10dBm(Input RF level without damage)	Load VSWR<1.5:1 (50 Ohm)
Pin=-5dBm	Load open or short for up to 10 minutes.
Pin=0dBm	Load VSWR<3:1 for continuous operation
Thermal Degradation	55°C

◆ DC Interface Connector (D-Sub 9-Pin, Male)

Pin #	Description	Specifications
1	GND	Ground
2	Shutdown	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
3	Temperature Alarm	Abnormal: Logic High (3.3V) (Internally Pulled-Low)
4	Fan Alarm	Abnormal: Logic High (3.3V) (Internally Pulled-Low)
5	Power Amplifier Alarm	Abnormal: Logic High (3.3V) (Internally Pulled-Low)
6-9	N/C	No electrical connected, Reserved


◆ Front Panel LED Indicators

Description	Specifications
POWER	GREEN: AC-220V is POWER ON status
TEMP	RED: Temperature is over-limited, Amplifier shutdown
FAN	RED: Fan is abnormal, Amplifier shutdown
ABNORMAL	RED: Amplifier is abnormal, Amplifier shutdown


◆ Plotted and other Data

Notes:


1. All specifications are guaranteed at +25° C case operating Temperature..
2. Handle only in approved ESD Workstation.
3. Unit is cooled by air-forced condition.

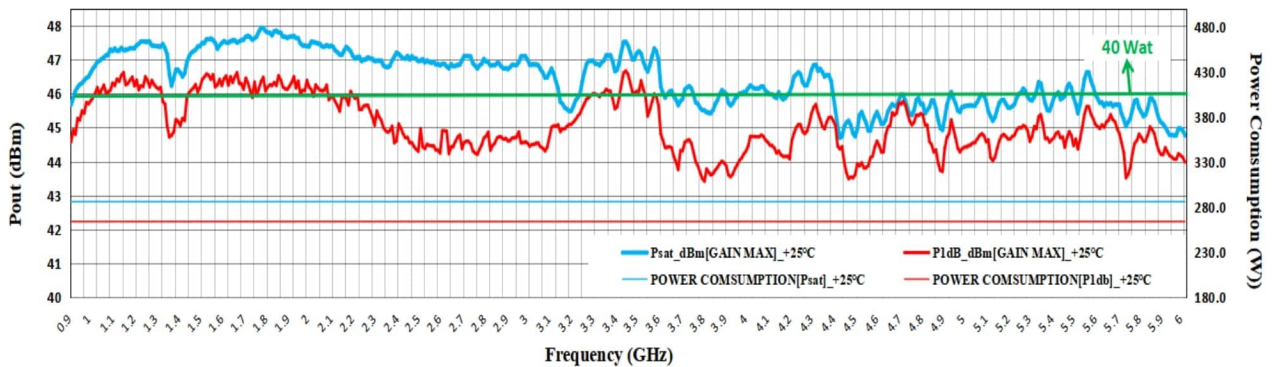

Pout@ Pin=0dBm & P1dB (CW, Gain MAX, Load VSWR≤1.2, 25°C), for reference only (Shipped Products)

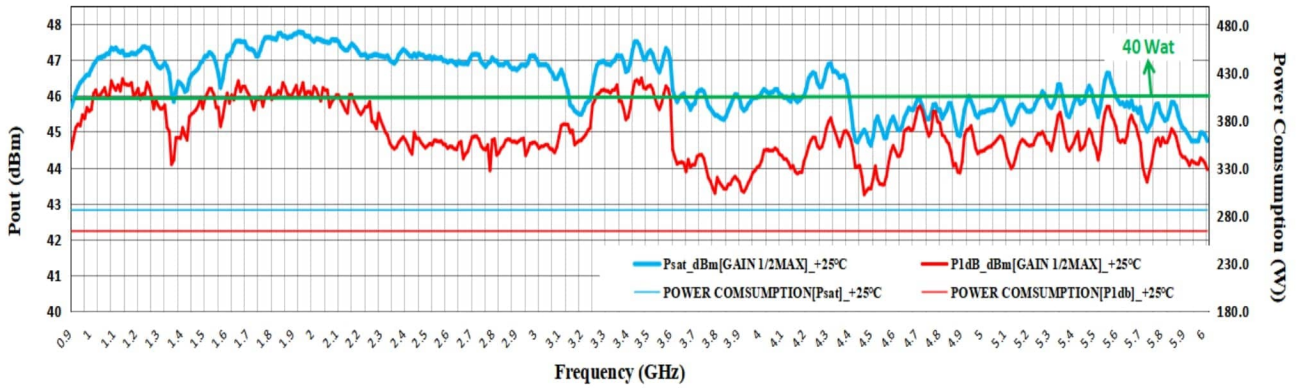

Pout@ Pin=0dBm & P1dB (CW, (Gain 1/2MAX, Load VSWR≤1.2, 25°C), for reference only (Shipped Products)

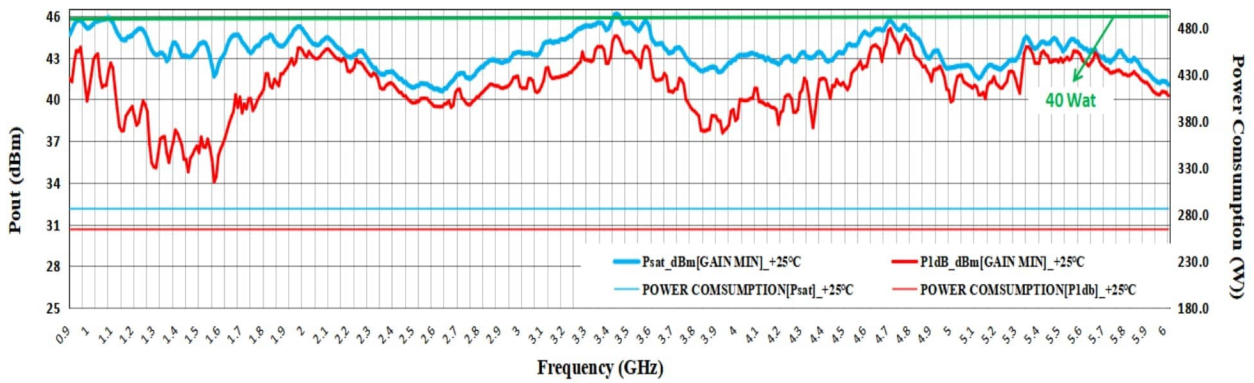

Pout@ Pin=0dBm & P1dB CW, (Gain MIN, Load VSWR≤1.2, 25°C), for Reference only (Shipped Products)

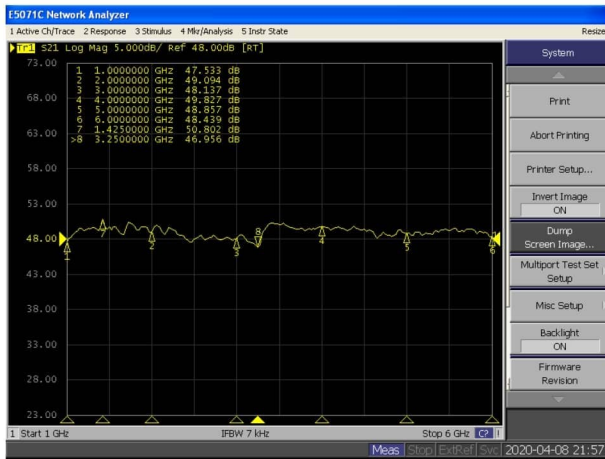


Figure left: Gain S21@ Pin=-3dBm (Ambient temp, +25±2°C, Load VSWR≤1.2), for reference only (Shipped Products)




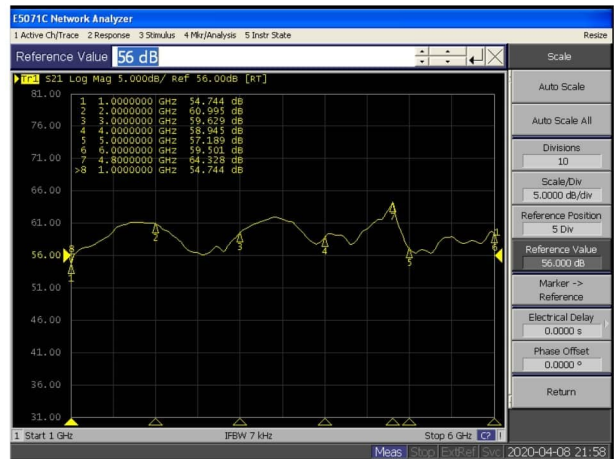


Figure right: Small signal gain @ Pin=-30dBm (Ambient temp, +25±2°C, Load VSWR≤1.2), for reference only (Shipped Products)

◆ Outline Drawings (mm)

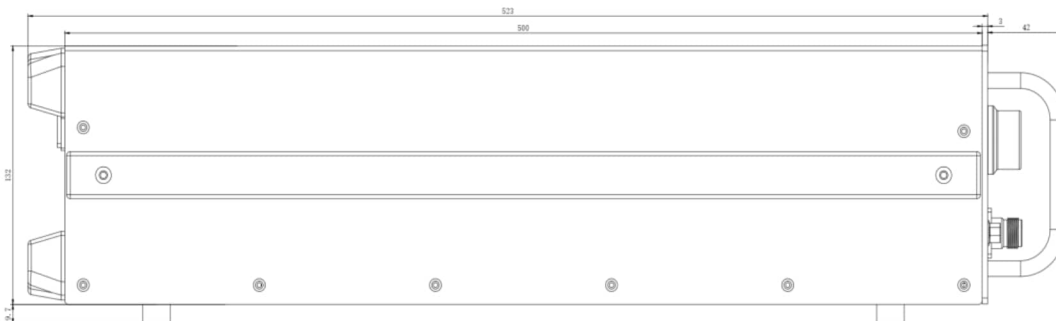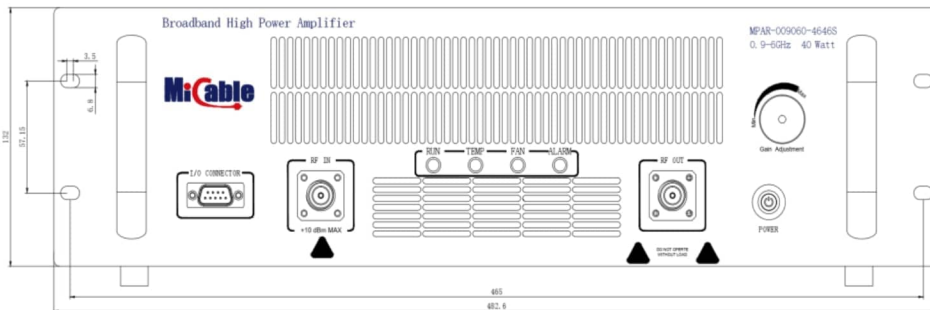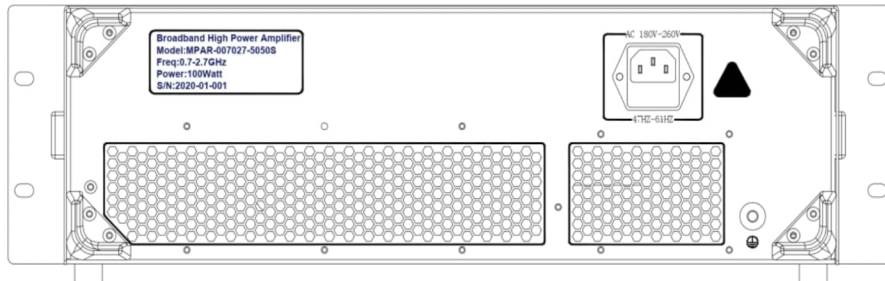

◆ Mechanical Definition

Dimensions (B,H,D) mm	482.6 x 132 x 503 (3U)
Weight (Kg)	17.5
RF-Input	N Female
RF-Output	N Female
RF Connector Forward Coupler (optional)	N Female
DC Connector	Dsub-9 Male
AC Connector	3 WIRE A/C Power Entry