

VNA67 Series (SMD1.85 Male-ST to NMD1.85 Female-ST)

Test Cable for Vector Network Analyzer, 50ohms, DC-67GHz



VNA67-0P-1V-"L" (L: Length)

Maximum Ratings

Operating Temperature	23°C± 5°C
Storage Temperature	-45°C to +85°C

Permanent damage may occur if any of these limits are exceeded



Cable Diameter	15.3mm	
Velocity of Propagation	80%	
Shielding Effectiveness	>90dB	
Power Handling at 40°C	1 GHz	115W
	6GHz	59W
	18 GHz	34W
	26.5 GHz	27W
	40 GHz	22W
	50 GHz	20W
67 GHz	17W	
Min. Bending Radius	1.97" (50mm)	

Features

- Ultra-wideband operation, DC to 67 GHz
- 1.85mm Rugged Female connector for direct interface with 67 GHz VNA ports
- Low insertion loss and excellent return loss
- Extra rugged construction includes protective shield and strain relief for longer life
- Stainless steel connector for long mating-cycle life
- Excellent amplitude and phase stability vs flexure and shaking

Applications

- Vector network analyzer (VNA) test cables

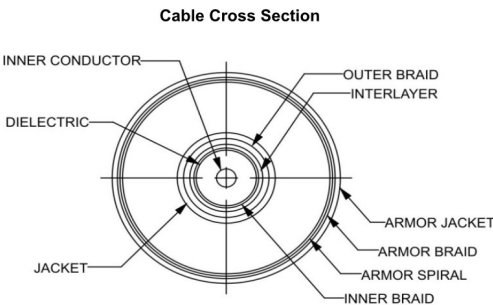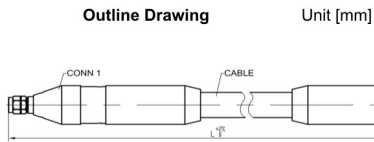

Cable Construction	
Inner Conductor	-
Dielectric	-
Inner Braid	-
Interlayer	-
Outer Braid	-
Jacket	-

Connectors	
• Nut, Stainless steel, Passivated	
• Body, Stainless steel, Passivated	
• Center contacts, Berillium Copper, Gold plated	
• Dielectric, PEI, Natural	

Product Guarantee*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse

Electrical Specifications at 25°C

Freq. (GHz)	Length	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC - 18		18-40		40-50		50-67		DC - 18		18-40		40-50		50-67	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
DC-67	2FT	2.0	2.3	3.4	3.8	3.8	4.2	4.2	4.8	1.15	1.25	1.22	1.30	1.26	1.35	1.31	1.35
	3FT	2.9	3.2	4.8	5.1	5.6	6.0	6.0	6.4								
	1M	4.1	4.3	5.2	5.5	6.1	6.4	6.6	6.9								

Typical Performance Data (VNA67-0P-1V-1M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.02	0.10
1000	1.04	0.62
2000	1.05	0.95
4000	1.07	1.41
5000	1.10	1.59
6000	1.11	1.80
7000	1.13	1.90
8000	1.12	2.05
9000	1.15	2.18
10000	1.11	2.37
12000	1.14	2.62
15000	1.12	2.91
16000	1.13	3.13
18000	1.15	3.30
20000	1.14	3.56
26500	1.17	4.02
40000	1.22	5.25
50000	1.26	6.02
67000	1.31	6.64

