

B32U Series (SMA Male-ST to SMA Male Q-ST)

Cable Assembly, 50ohms, DC-18GHz



B32U-01-01Q-"L" (L: Length)

Maximum Ratings

Operating Temperature -55°C to +85°C

Storage Temperature -55°C to +85°C

Permanent damage may occur if any of these limits are exceeded

Cable Diameter	4.0mm	
Velocity of Propagation	76%	
Shielding Effectiveness	>90dB	
Power Handling at 40°C	1 GHz	460W
	6 GHz	182W
	12GHz	126W
	16 GHz	106W
	18 GHz	99W
Min. Bending Radius	14mm	

Features


- Quick connection/disconnection
- Ultra flexible
- Super high shielding effectiveness >90dB
- Low loss: cable insertion loss <1.88dB/m@18GHz
- Very stable performance during flexing and shaking
 - Amplitude Stability: <±0.05dB@18GHz
 - Phase Stability vs. Flexure: <±2°@18GHz
 (When wrapped 360° around a 40mm radius mandrel)

Applications


- Production line testing
- Equipment and rack connection
- Test system installation

Outline Drawing

Unit [mm]



Cable Cross Section

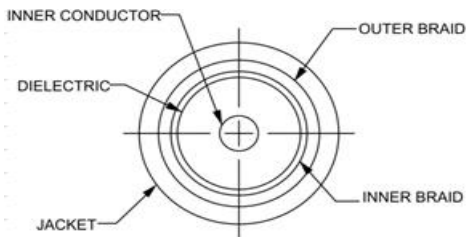

Cable Construction	
Inner Conductor	SPC, Solid
Dielectric	ND-PTFE
Inner Braid	Aluminum Foil
Outer Braid	Silver-Plated Copper Braid
Jacket	PUR

Connectors	
● Nut, Brass, Nickel Plated	
● Body, Brass, Nickel Plated	
● Center contacts, Brass, Gold plated	
● Dielectric, PTFE	

Product Guarantee*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse

Electrical Specifications at 25°C

Freq. (GHz)	Length (M)	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC - 3		3-6		6-12		12-18		DC - 3		3-6		6-12		12-18	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
DC-18	0.5	0.6	0.7	0.7	0.9	1.0	1.2	1.1	1.4	1.05	1.10	1.09	1.15	1.13	1.20	1.20	1.25
	1	0.9	1.0	1.2	1.4	1.7	1.9	2.1	2.4								
	1.5	1.2	1.4	1.8	2.0	2.5	2.7	3.1	3.4								

Typical Performance Data (B32L-01-01Q-1M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.01	0.04
1000	1.03	0.36
2000	1.05	0.54
3000	1.06	0.73
4000	1.07	0.81
5000	1.08	0.98
6000	1.09	1.10
7000	1.09	1.15
8000	1.10	1.22
9000	1.11	1.31
10000	1.12	1.42
12000	1.13	1.56
15000	1.17	1.81
18000	1.20	2.06

