

SMT Bi-Directional Coupler

Model D2002M260620 Rev.A

2.6-6.2GHz 20dB Bi-Directional Coupler, SMT



All specifications are subject to change without notice at any time

Specifications

Frequency Range	GHz	2.6-6.2
Main Line VSWR	:1 (Max.)	1.3
Coupling VSWR	:1 (Max.)	1.3
Insertion Loss ¹	dB(Max.)	0.25
Coupling	dB(Max.)	20±1
Flatness	dB(Max.)	±1.2
Directivity	dB(Min.)	15

PORT CONFIGURATION


INPUT	OUTPUT	FORWARD COUPLED	REFLECTED COUPLED
J1	J2	J3	J4 ADD 50Ω TERMINATION
J1	J2	J3 ADD 50Ω TERMINATION	J4
J2	J1	J4	J3 ADD 50Ω TERMINATION
J2	J1	J4 ADD 50Ω TERMINATION	J3

Power ²	W(Max.)	CW: 100
Weight	g(Max.)	1
Dimension ³	mm (LxWxH)	14.22x8.89x1.58

Interface	Surface Mount
Finishing	Immersion Gold
Temperature	Operating: -55~+85°C; Storage: -55~+100°C
Environmental	N/A
Eng. Customized	N/A

- Note:
1. Power loss at coupled port excluded
 2. VSWR ≤1.2 required for CW
 3. Unless otherwise specified, Decimal tolerance: x.±1; .x±0.5; .xx±0.25

Outline Drawing

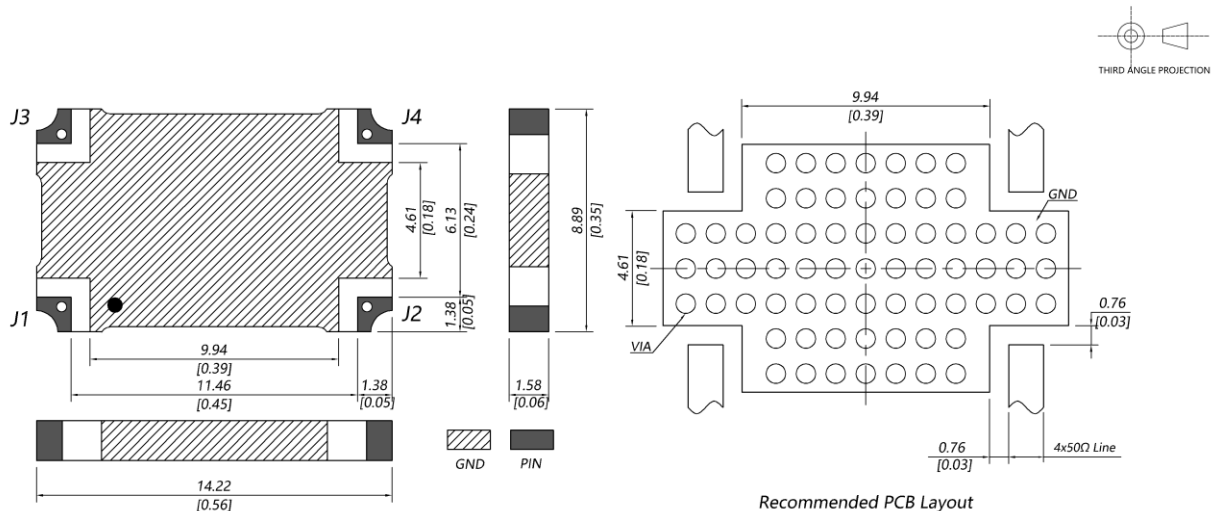

SMT Bi-Directional Coupler

Model D2002M260620 Rev.A

2.6-6.2GHz 20dB Bi-Directional Coupler, SMT

Typical Graph

@Ambient Temperature

