

High Power Dual-Directional Coupler

Model D4005HB020060 Rev.A

2-6GHz 40dB 250Watt Dual-Directional Coupler, Coaxial connector




Specifications

All specifications are subject to change without notice at any time

Frequency Range	GHz	2-6	
Main Line VSWR	:1 (Max.)	1.3	
Coupling VSWR	:1 (Max.)	1.3	
Insertion Loss ¹	dB(Max.)	0.4	
Coupling	dB(Max.)	40±0.7	
Flatness	dB(Max.)	±0.9	
Directivity	dB(Min.)	15	
Power ²	W(Max.)	CW: 250; Peak: 3000	
Weight	g(Max.)	260	Dimension ³ mm (LxWxH) 80.7x20.0x45.0
Interface	Main line: TYPE N [F], Coup.: SMA [F]; Stainless steel connector, Per IEC 61169		
Finishing	Nickel plating, Per QQ-N-290		
Temperature	Operating: -55~+85°C; Storage: -55~+100°C		
Environmental	Optional: Per MIL-STD-202F (contact supplier for detail info.)		
Eng. Customized	N/A		

- Note:
1. Theoretical coupling loss included
 2. VSWR ≤ 1.2 required for CW
 3. Unless otherwise specified, Decimal tolerance: x.±1; .x±0.5; .xx±0.1

Outline Drawing

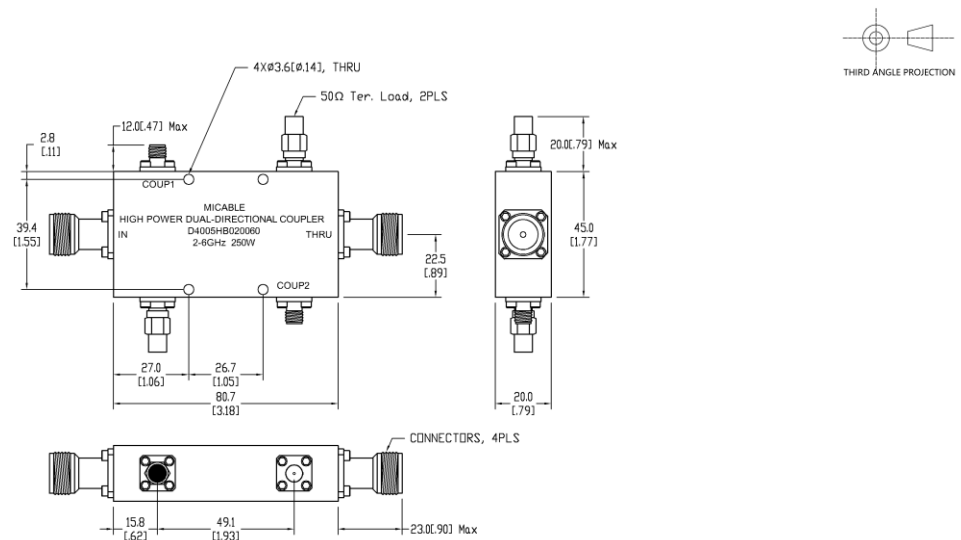

High Power Dual-Directional Coupler

Model D4005HB020060 Rev.A

2-6GHz 40dB 250Watt Dual-Directional Coupler, Coaxial connector

Typical Graph

Typical test environment: 25°C and 60%RH

