

Fixed Attenuator

Model FA67-0106-185MFH Rev.B

DC-67GHz 1.85mm Fixed Attenuator; 6dB; 1W;

Micable FA67-0106-185MFH is a DC-67GHz fixed attenuator, it has excellent attenuation accuracy and VSWR. It's finished with passivated stainless steel body, and has rugged configuration and long life of use. It is ideal for the wideband system precision attenuation control, test and improvement of matching.




Specifications

All specifications are subject to change without notice at any time

Frequency Range	GHz	DC-67
VSWR	:1(Max.)	1.35
Attenuation	dB(Typ.)	6
Attenuation Accuracy	dB(Max.)	-0.7~+0.7
Impedance	50Ω	
Power	≤1W	
Durability	≥500 Cycles	
Weight	≤7g	
Dimension ¹	Φ9.0x22.2 (mm)	
Interface	1.85mm [M] - 1.85mm [F]	
Outer Conductor	Stainless steel, passivated	
Center Conductor	BeCu, gold plating	
Dielectric	PEI	
Temperature	Operating: -55~+125°C	

Note 1. Unless otherwise specified, Decimal tolerance: x.±0.3

Outline Drawing

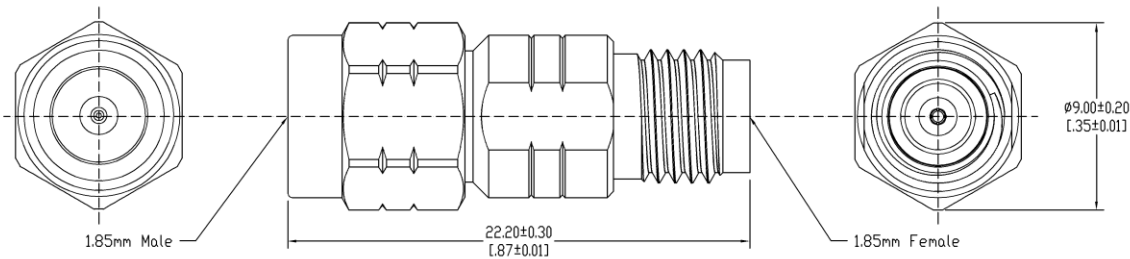

Fixed Attenuator

Model FA67-0106-185MFH Rev.B

DC-67GHz 1.85mm Fixed Attenuator; 6dB; 1W;

Typical Graph

Typical test environment: 25°C and 60%RH

