

# Amplifier

---

**Model**    **MPAR-060180S43**    **Rev.A**

6-18GHz Solid State Power Amplifier

-Frequency range: 6-18GHz

-Psat:  $\geq 43\text{dBm}$ , Gain:  $\geq 43\text{dB}$

-Built-in control, monitoring and protection circuits

---

## ◆ Product Description

The MPAR-060180S43 is a 6-18GHz, saturated power  $\geq 43\text{dBm}$  high gain solid state power amplifier with state-of-art GaN design technology. It has higher saturated output power while keeping higher P1dB and better linearity, and can adapt to a variety of different signal modes such as continuous wave, pulse, wide instantaneous bandwidth signal, high-order modulation signal and etc. It is designed for applications, such as radar, communication, EMC testing and etc.

## ◆ Function

- Amplifying signal within 6-18GHz
- Over-heating, over-excitation, over-VSWR protection and fan alarm functions

# Amplifier

## ◆ Electrical Specifications

Frequency Range	GHz		6-18
Saturated Output Power	dBm	Typ./Min.	45/43@ Pin=0dBm
P1dB	dBm	Typ./Min.	42/38
Gain	dB	Typ./Min.	45/43@ Pin=0dBm
Gain Flatness	dB	Typ.	±1.5@ Pin=0dBm
Small Signal Gain	dB	Typ.	55@ Pin=-30dBm
Small Signal Gain Flatness	dB	Typ.	±3@ Pin=-30dBm
Isolation@ Disable Status	dB	Typ.	90
Input Power	dBm	Typ.	0
2 <sup>nd</sup> Harmonic Suppression	dBc	Typ./Max.	-20/-12@ Pout=43dBm
3 <sup>rd</sup> Harmonic Suppression	dBc	Typ./Max.	-30/-12@ Pout=43dBm
Spurious Suppression	dBc	Typ./Max.	-70/-65@ Pout=43dBm
Input VSWR	:1	Typ./Max.	1.5/2
Supply Voltage	V	Typ.	110-240 (47-61Hz / Single-Phase)
Power Consumption	W	Typ.	500@ Pin=0dBm

## ◆ Limits

Input Power	Pin≤10dBm (Input RF level without damage)
Load VSWR	VSWR≤3:1 (Pout=43dBm)
	Power off (VSWR≥5:1 and Pout≥33dBm)
Thermal Degradation	75°C


# Amplifier

## Mechanical Specifications

RF Input Connector	TYPE N [F]	
RF Output Connector	TYPE N [F]	
Power supply Connector	3 WIRE A/C Power Entry (IEC320-C14 ,Including fuses)	
Control Connector	D-Sub 9Pin	
Dimension	mm	3U, 19 inch
Weight	kg Max.	20
Finishing	Spraying plastics	
Temperature	Operating: -10°C~+55°C; Storage: -40°C ~ +75°C	
Heat Dissipation	Unit is cooled by air-forced condition	
Environmental <sup>1</sup>	N/A	


Note: 1. Altitude, vibration and shock are designed with considerations, but without tests and experiments.

## Outline Drawing

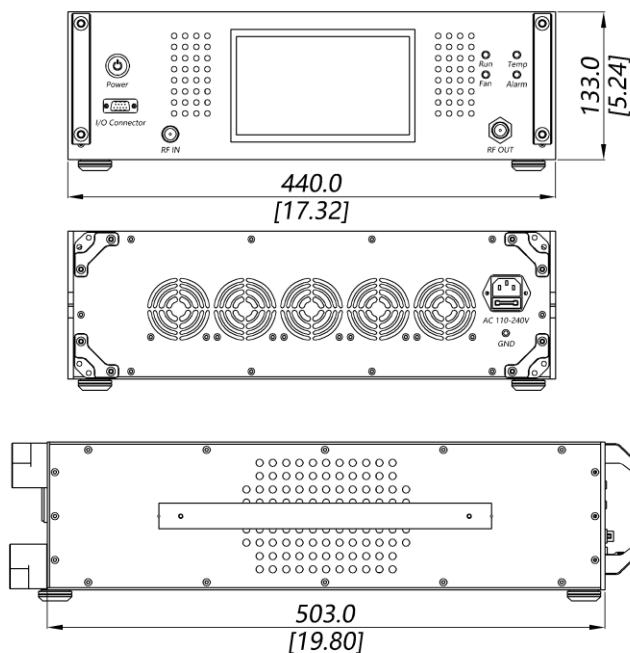

# Amplifier

## ◆ Interface Connector Pin Out



### D-Sub 9Pin

Pin No.	Signal	Description
1.	GND	Ground
2.	Shutdown	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
3.	Temperature Alarm	Abnormal: Logic High (3.3V) (Internally Pulled-Low)
4.	Fan Alarm	Abnormal: Logic High (3.3V) (Internally Pulled-Low)
5.	Power Amplifier Alarm	Abnormal: Logic High (3.3V) (Internally Pulled-Low)
6-9.	N/C	No electrical connected, Reserved

## ◆ Front Panel LED Indicators

LED No.	Label	Description
1.	RUN	GREEN: Internal power turn on, Amplifier is awoken and ready to work
2.	TEMP	RED: Temperature is over-limited, Amplifier shutdown
3.	FAN	RED: Fan is abnormal, Amplifier shutdown
4.	ALARM	RED: Amplifier is abnormal, Amplifier shutdown, Connect D-Sub 9 to debug