

# 4-Port 90° SMT Hybrid Coupler

## Model Q10M047065 Rev.B

470-650MHz 4-Port 3dB 90° Hybrid, SMT



### Specifications

All specifications are subject to change without notice at any time

Frequency Range	MHz	470-650
Nom. Phase	Deg. (Typ.)	90
Ports VSWR	:1 (Max.)	1.2
Insertion Loss <sup>1</sup>	dB(Max.)	0.25
Amp. Unbalance	dB(Max.)	±0.35
Phase Unbalance	Deg. (Max.)	±2
Isolation	dB(Min.)	22

#### PORT CONFIGURATION


INPUT	J1	J2	J3	J4
J1	-	ISO	0°	-90°
J2	ISO	-	-90°	0°
J3	0°	-90°	-	ISO
J4	-90°	0°	ISO	-



Power <sup>2</sup>	W(Max.)	CW: 500		
Weight	g(Max.)	6	Dimension <sup>3</sup> mm (LxWxH)	17.00x34.00x3.92
Interface	Surface Mount			
Finishing	Immersion Gold			
Temperature	Operating: -55~+85°C; Storage: -55~+100°C			
Environmental	N/A			
Eng. Customized	N/A			

- Note:
- Above theoretical 3dB and amplitude unbalance
  - VSWR ≤ 1.2 required for CW
  - Unless otherwise specified, Decimal tolerance: x.±1; .x±0.5; .xx±0.25

### Outline Drawing

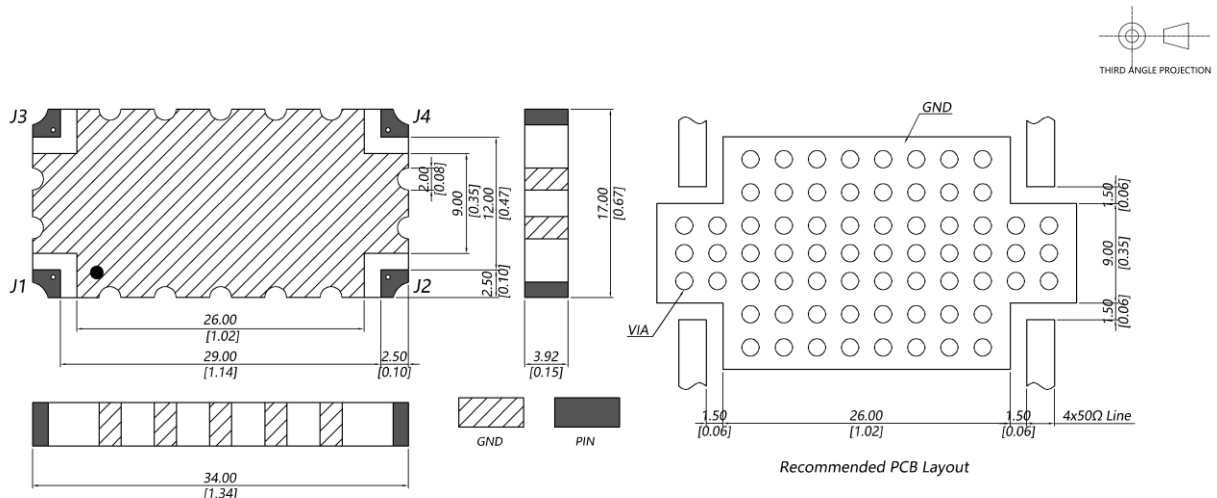

# 4-Port 90° SMT Hybrid Coupler

## Model Q10M047065 Rev.B

470-650MHz 4-Port 3dB 90° Hybrid, SMT

### Typical Graph

Typical test temperature @25°C

