


4-Port 90° Hybrid Coupler

Model QN240440 Rev.A

24-44GHz 4-Port 3dB 90° Hybrid, Coaxial connector




Specifications

All specifications are subject to change without notice at any time

Frequency Range	GHz	24-44	
Nom. Phase	Deg. (Typ.)	90	
Ports VSWR	:1 (Max.)	1.8	
Insertion Loss ¹	dB(Max.)	2.3	
Amp. Unbalance	dB(Max.)	±0.8	
Phase Unbalance	Deg. (Max.)	±10	
Isolation	dB(Min.)	14	
Power ²	W(Max.)	CW: 20; Peak: 1000	
Weight	g(Max.)	55	Dimension ³ mm (LxWxH) 21.9x43.7x12.7
Interface	Stainless steel connector; Input: 2.4mm [F], Output: 2.4mm [F]		
Finishing	Nickel plating		
Temperature	Operating: -55~+85°C; Storage: -55~+100°C		
Environmental	Per MIL-STD-202F, Method 107D, 204D, 213B (optional, contact supplier for detail info.)		
Eng. Customized	N/A		

- Note:
1. Above Theoretical Loss 3dB
 2. VSWR ≤ 1.2 required for CW
 3. Unless otherwise specified, Decimal tolerance: x±1; .x±0.5; .xx±0.1

Outline Drawing

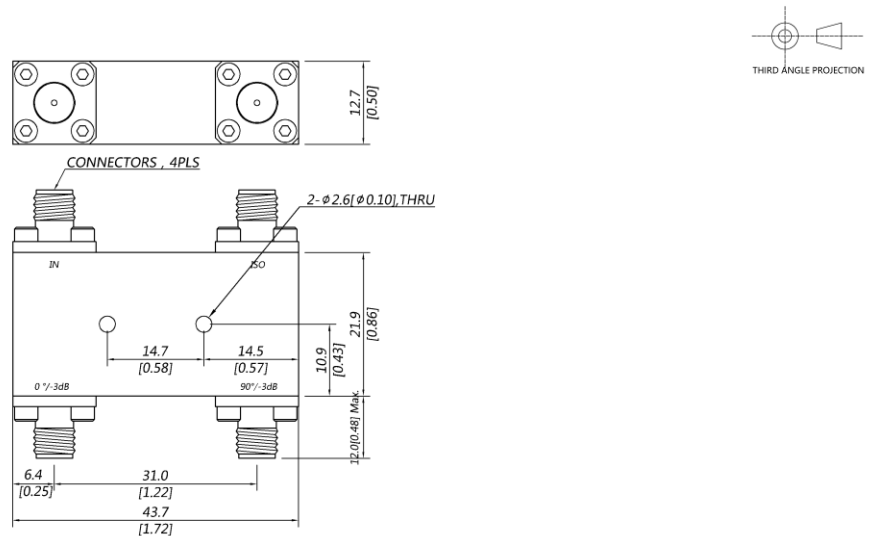

4-Port 90° Hybrid Coupler

Model QN240440 Rev.A

24-44GHz 4-Port 3dB 90° Hybrid, Coaxial connector

Typical Graph

Typical test temperature @25°C

