

## Bi-Directional Coupling Detector

### Model - SA-06-03

Rev. - A

Bi-Directional Detector. It can measure, detect and output the forward/reverse power data of the load under test.

MiCable




Electrical & Mechanical Specifications

Frequency Range: 2-6GHz;  
Forward detection voltage:  $1.2 \pm 0.2V$  (100W CW);  
Detection voltage flatness:  $\leq 15\%$ ;  
Temperature change rate:  $\leq \pm 2.5\%$  ( $-50 \sim +55^\circ C$ );  
Main Line VSWR:  $\leq 1.3$ ;  
Insertion Loss:  $\leq 0.5dB$ ;  
Coupling:  $\leq 37 \pm 1dB$ ;  
Directivity:  $\geq 12dB$ ;  
CW Power: 200W;  
Dimension: 91.4x40x20mm;  
Connector Type: TYPE N[F], I.A.W. IEC 61169;  
Surface Coating: Nickel plating, I.A.W ISO 4527;

Note3- Unit: mm , Unless otherwise specified, .x  $\pm 1.0$  .xx  $\pm 0.50$  Holes:  $\pm 0.3$  All specifications are subject to change without notice at any time

2D Outline Drawing

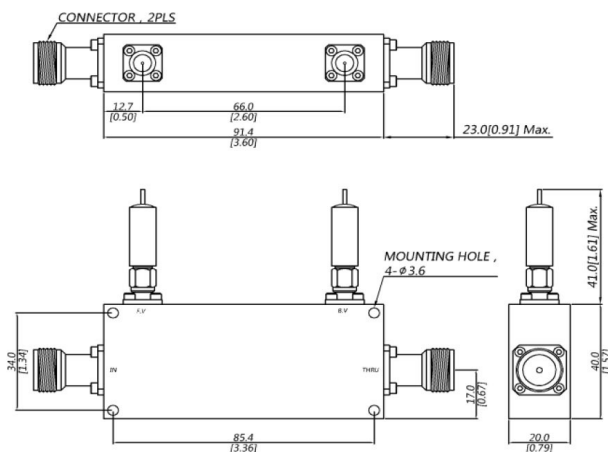

MiCable

Fujian MiCable Electronic Technology Group Co.,Ltd

[www.micable.cn](http://www.micable.cn)

+86 400-918-0388

[sales@micable.cn](mailto:sales@micable.cn)