

# Coaxial Termination

## Model TM67-01-185M Rev.A

### DC-67GHz 1.85mm Termination



Micable TM67-01-185M is a DC-67GHz ultra-wideband coaxial termination, it has very low VSWR less than 1.4:1 over DC-67GHz. The termination can absorb up to 1W CW signal power, has very wide operating temperature range of -55~+125°C. It is ideal for various applications like test, radar and communication etc.



### Specifications

All specifications are subject to change without notice at any time

Frequency Range	GHz	DC-67
VSWR	:1(Max.)	1.4
Impedance	50Ω	
Power	≤1W	
Durability	≥500 Cycles	
Weight	≤5g	
Dimension	Φ9.0x15.3 (mm)	
Interface	1.85mm [M]	
Outer Conductor	Stainless steel, passivated	
Center Conductor	BeCu, gold plating	
Dielectric	PEI	
Temperature	Operating: -55~+125°C	

Note 1. Unless otherwise specified, Decimal tolerance: x.±0.3

### Outline Drawing

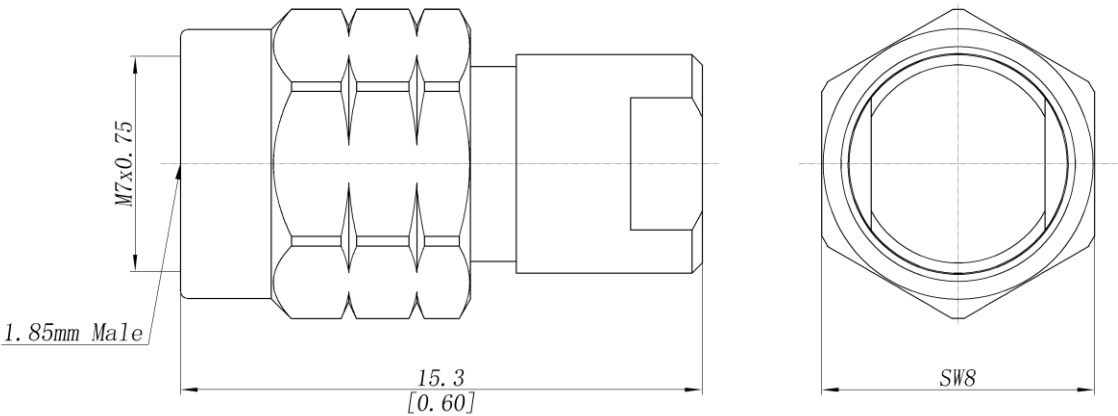

Coaxial Termination

Model **TM67-01-185M Rev.A**

DC-67GHz 1.85mm Termination

Typical Graph

@Ambient Temperature

