

HSM50 HIGH SPEED MULTI-COAXIAL CABLE ASSEMBLIES

DC to 50GHz

Basic Information

- **Item Name** HSM50 High Speed Multi-Coaxial Cable Assemblies
- **Cable** .086" Low Loss Flexible Cable
- **End 1 Coax Contact** SMPM Female
- **End 2 Connector** 2.4mm Male

Features

- Spring-Loaded Contact
- One-Piece Interface for Direct-Attach Mount
- Solder-Free Installation
- High-Density, Space-Saving Design
- Single Row or Double Row Option

Typical Application

- Signal Integrity Measurement
- SERDES Development
- Differential Signal Measurement
- Physical Layer Measurement
- Jitter Measurement
- Automated Test Equipment



PAM 4

112
Gbps

PAM 4

224
Gbps

Specification

Parameter	Performance
Channels	8 (1 Row) or 16 (2 Rows)
Pitch	4mm
Frequency Range	DC-50GHz
Insertion Loss	$<5.72 * L(M) + 0.6dB$ @ DC-50GHz
VSWR	$<1.35:1$ @ DC-50GHz
Delay Match	± 1 ps
Insulation Resistance	>1000 M Ω
Impedance	50 Ω
Voltage Standing (V, DC)	$>500V$
Temperature	-55 $^{\circ}C$ ~ +85 $^{\circ}C$

© www.micable.cn


MiCable

Fujian Micable Electronic Technology Group Co., Ltd Tel.: +86-591-87382856 Email: sales@micable.cn




查看电子版说明书

Outline Drawing:

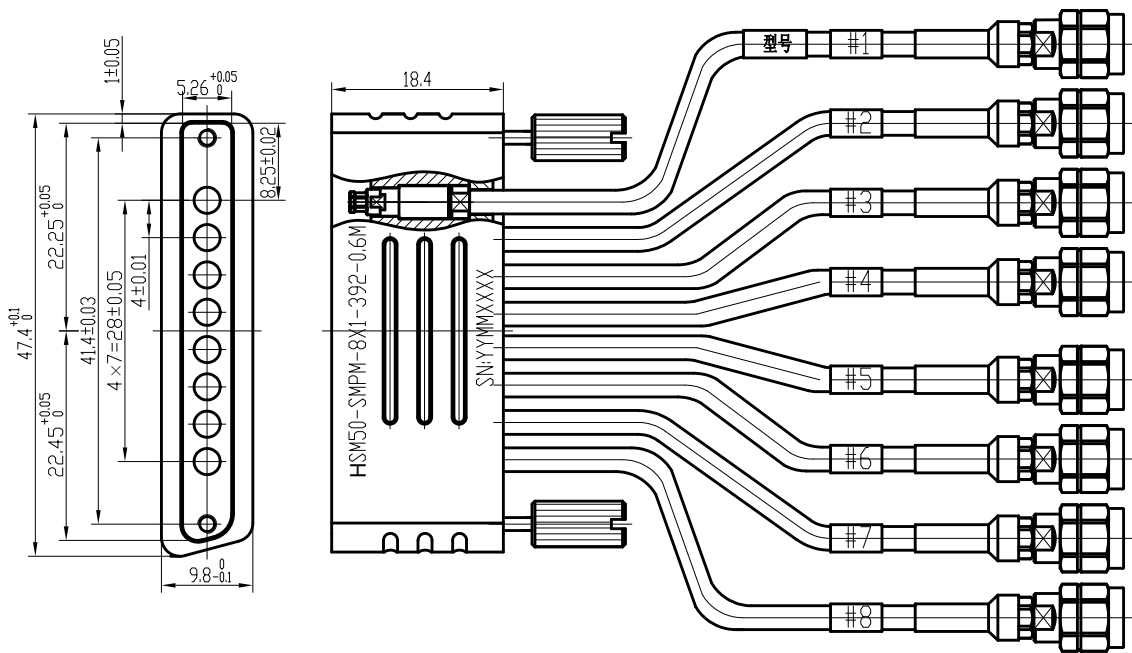

Recommended Socket Size:

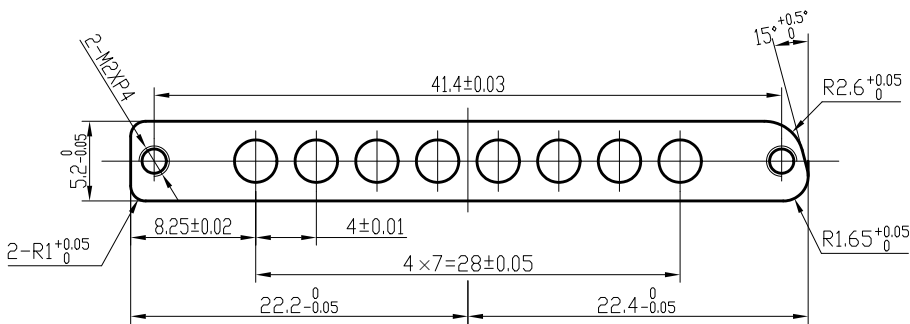

Part Numbering: ☒

HSM50-SMPM-8X1-392-0.6M

- Length
- End 2 Connector Type (392 - 2.4mm Male)
- Channel & Row Number
- End 1 Contact Type
- Transmission Type Frequency



Electrical Specification

