

Power Divider

Model P02DD020 Rev.A


DC-20GHz 2-Way Resistive Power Divider



All specifications are subject to change without notice at any time


Specifications

Frequency Range	GHz	DC-20	
VSWR	:1 (Max.)	1.2	
Insertion Loss ¹	dB(Max.)	6.6	
Amp. Unbalance	dB(Max.)	±0.3	
Phase Unbalance	Deg. (Max.)	±3	
Isolation	dB(Typ.)	6.2	
CW Power ²	W(Max.)	1	
Weight	g(Max.)	55	Dimension ³ mm (LxWxH) 26.5x30.0x16.5
Interface	Stainless steel SMA [F], Per IEC 61169		
Finishing	Nickel plating, Per QQ-N-290		
Temperature	Operating: -40~+70°C; Storage: -55~+85°C		
Environmental	Optional: Per MIL-STD-202F (contact supplier for detail info.)		
Eng. Customized	N/A		



- Note:
1. Theoretical 6dB Included
 2. VSWR ≤ 1.2 required for CW
 3. Unless otherwise specified, Decimal tolerance: x.±1; .x±0.5; .xx±0.1

Outline Drawing

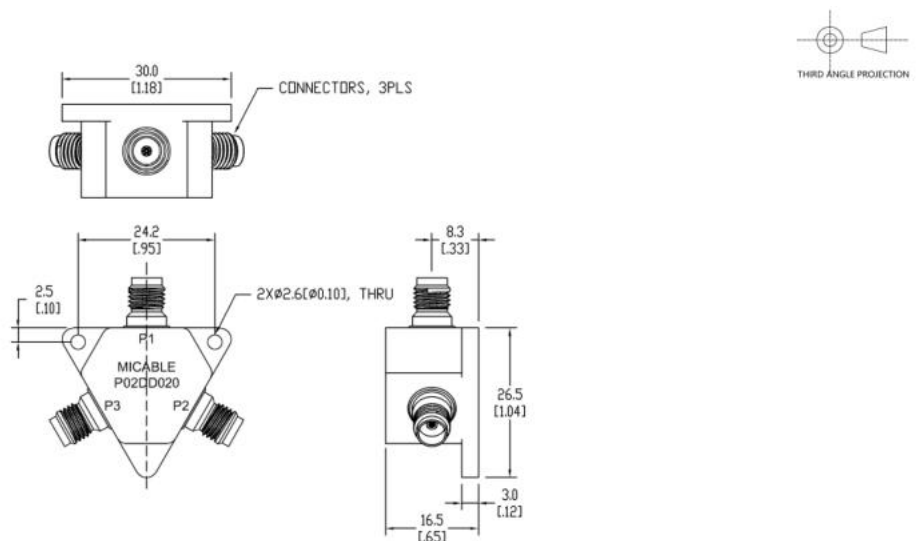

Power Divider

Model **P02DD020** Rev.A

DC-20GHz 2-Way Resistive Power Divider

Typical Graph

Typical test environment: 25°C and 60%RH

