

4-Port 90° SMT Hybrid Coupler

Model Q1M030035 Rev.A

300-350MHz 4-Port 3dB 90° Hybrid, SMT



Specifications

All specifications are subject to change without notice at any time

Frequency Range	MHz	300-350
Nom. Phase	Deg. (Typ.)	90
Ports VSWR	:1 (Max.)	1.3
Insertion Loss ¹	dB(Max.)	0.4
Amp. Unbalance	dB(Max.)	±0.3
Phase Unbalance	Deg. (Max.)	±3
Isolation	dB(Min.)	18

PORT CONFIGURATION

INPUT	J1	J2	J3	J4
J1	-	ISO	0°	-90°
J2	ISO	-	-90°	0°
J3	0°	-90°	-	ISO
J4	-90°	0°	ISO	-




Power ²	W(Max.)	CW: 50
Weight	g(Max.)	5
Dimension ³	mm (LxWxH)	12.70x25.40x2.00

Interface	Surface Mount
Finishing	Immersion Gold
Temperature	Operating: -55~+85°C; Storage: -55~+100°C
Environmental	N/A
Eng. Customized	N/A

- Note:
- Above theoretical 3dB and amplitude unbalance
 - VSWR ≤ 1.2 required for CW
 - Unless otherwise specified, Decimal tolerance: x.±1; .x±0.5; .xx±0.25

Outline Drawing

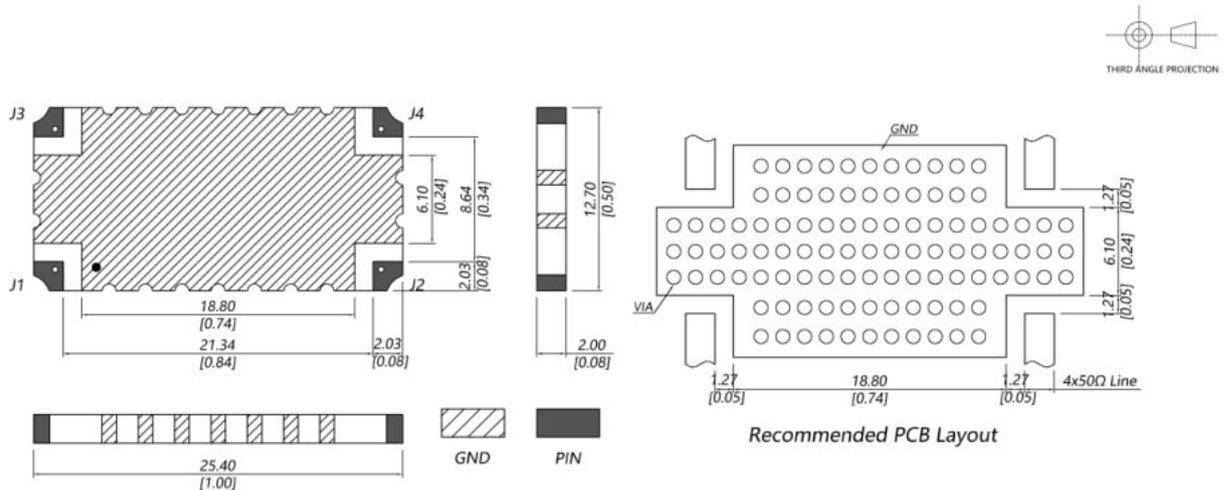

4-Port 90° SMT Hybrid Coupler

Model Q1M030035 Rev.A

300-350MHz 4-Port 3dB 90° Hybrid, SMT

Typical Graph

Typical test environment: 25°C and 60%RH

