

50Ω Adapter SMA Female - SMA Female Bulkhead

Part Number: SMA-FFYH




Specifications

Electrical Specifications at 25° C, all specifications are subject to change without notice at any time. Rev. C

Frequency Range	DC-27GHz
VSWR (Max.)	1.15:1
Insertion Loss (Max.)	0.25dB
Durability (Min.)	1000 cycles
Insulation Resistance (Min.)	5000 MΩ
Dielectric Withstanding Voltage (Min.)	1000 Vrms
Operating Temperature	-65° C~+165° C
Outer Conductor	Stainless Steel Passivated
Center Conductor	Gold-Plated Beryllium Copper
Dielectric	PTFE

Outline Drawing

Note: Unless otherwise specified, Decimal Note tolerance: ±0.2

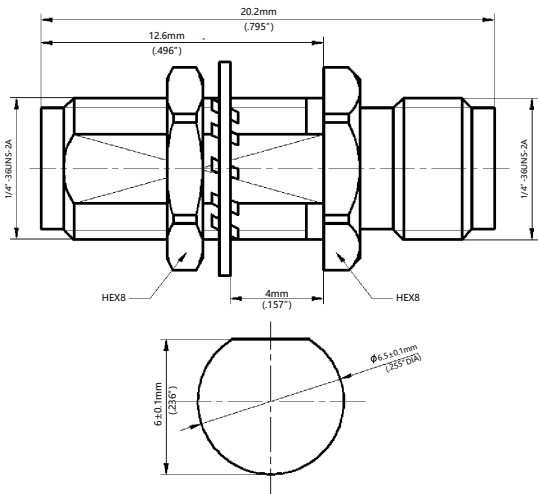

50Ω Adapter SMA Female - SMA Female Bulkhead

Part Number: SMA-FFYH

Typical Graph

Electrical Specifications at 25° C, all specifications are subject to change without notice at any time. Rev. C

