

50Ω Adapter SMA Male - SMA Female Right Angle



Part Number: SMA-MFWH


Specifications

Electrical Specifications at 25° C, all specifications are subject to change without notice at any time. Rev. B

Frequency Range	DC-27GHz
VSWR (Max.)	1.20:1
Insertion Loss (Max.)	0.45dB
Durability (Min.)	1000 cycles
Insulation Resistance (Min.)	5000 MΩ
Dielectric Withstanding Voltage (Min.)	1000 Vrms
Operating Temperature	-65° C~+165° C
Outer Conductor	Stainless Steel Passivated
Center Conductor	Gold-Plated Beryllium Copper & Brass
Dielectric	PEI&PTFE

Outline Drawing

Note: Unless otherwise specified, Decimal Note tolerance: ±0.2

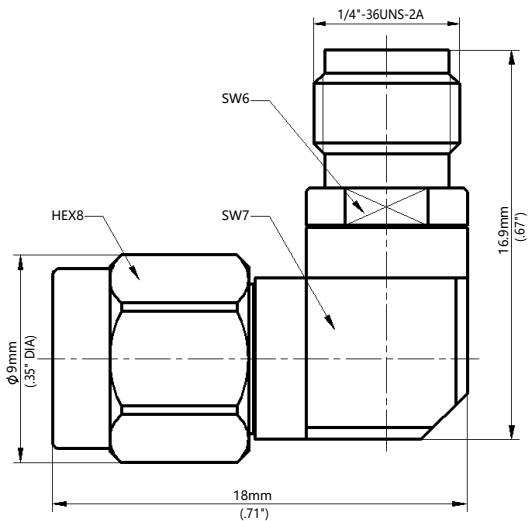

50Ω Adapter SMA Male - SMA Female Right Angle

Part Number: SMA-MFWH

Typical Graph

Electrical Specifications at 25° C, all specifications are subject to change without notice at any time. Rev. B

