

# Power Divider/Combiner

## Model P02N00450800 Rev.A

0.45-8GHz 2-Way Power Divider/Combiner, Coaxial connector




### Specifications

All specifications are subject to change without notice at any time

Frequency Range	GHz	0.45-8	
Sum VSWR	:1 (Max.)	1.4	
Distri. VSWR	:1 (Max.)	1.4	
Insertion Loss <sup>1</sup>	dB(Max.)	1	
Amp. Unbalance	dB(Max.)	±0.2	
Phase Unbalance	Deg. (Max.)	±3	
Isolation	dB(Min.)	18	
Power <sup>2</sup>	W(Max.)	CW: FOR 30, REV 5; Peak: 3000	
Weight	g(Max.)	180	Dimension <sup>3</sup> mm (LxWxH) 180.0x25.7x12.7
Interface	Sum: SMA [F], Distri.: SMA [F]; Stainless steel connector, Per IEC 61169		
Finishing	Alloy iridite, Per MIL-DTL-5541F		
Temperature	Operating: -55~+85°C; Storage: -55~+100°C		
Environmental	Optional: Per MIL-STD-202F (contact supplier for detail info.)		
Eng. Customized	N/A		

- Note:
1. Above Theoretical Loss 3dB
  2. VSWR ≤ 1.2 required for forward CW; Amp. & phase unbalance required for reversed input signals
  3. Unless otherwise specified, Decimal tolerance: x.±1; .x±0.5; .xx±0.1

### Outline Drawing

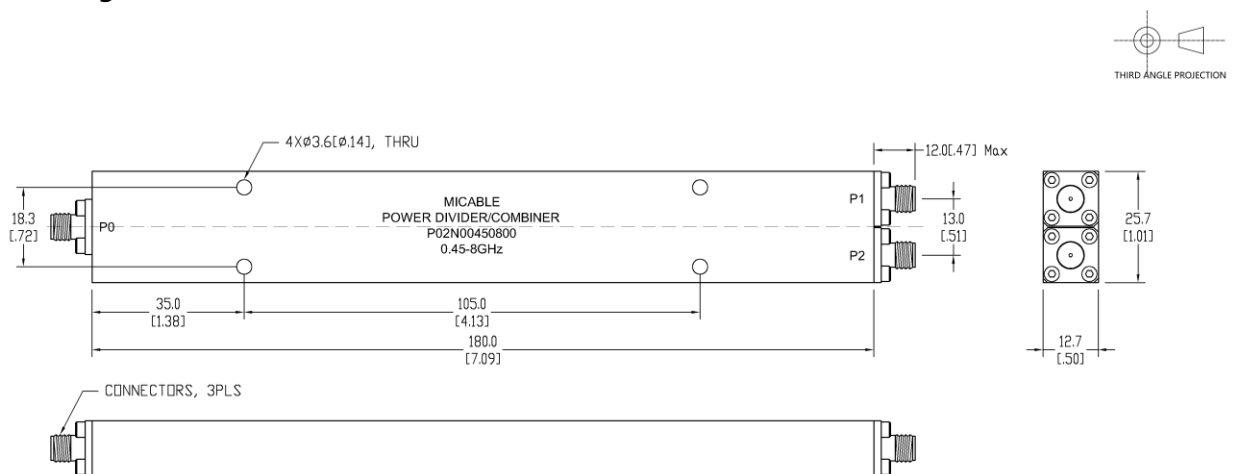

# Power Divider/Combiner

## Model P02N00450800 Rev.A

0.45-8GHz 2-Way Power Divider/Combiner, Coaxial connector

### Typical Graph

Typical test environment: 25°C and 60%RH

