

Fixed Attenuator

Model FA26-0203-SMSF Rev.A

DC-26.5GHz SMA Fixed Attenuator; 3dB; 2W;

Micable FA26-0203-SMSF is a DC-26.5GHz fixed attenuator, it has excellent attenuation accuracy and VSWR. It's finished with passivated stainless steel body, and has rugged configuration and long life of use. It is ideal for the wideband system precision attenuation control, test and improvement of matching.




Specifications

All specifications are subject to change without notice at any time

Frequency Range	GHz	DC-12	12-18	18-26.5
VSWR	:1(Max.)	1.25	1.3	1.35
Attenuation	dB(Typ.)	3	3	3
Attenuation Accuracy	dB(Max.)	-0.4~+0.6	-0.4~+0.6	-0.4~+0.6
Impedance	50Ω			
Power	≤2W			
Durability	≥500 Cycles			
Weight	≤5g			
Dimension ¹	Φ9.0x21.6 (mm)			
Interface	SMA [M] - SMA [F]			
Outer Conductor	Stainless steel, passivated			
Center Conductor	BeCu / Brass, gold plating			
Dielectric	PTFE			
Temperature	Operating: -55~+125°C			

Note 1. Unless otherwise specified, Decimal tolerance: x.±0.3

Outline Drawing

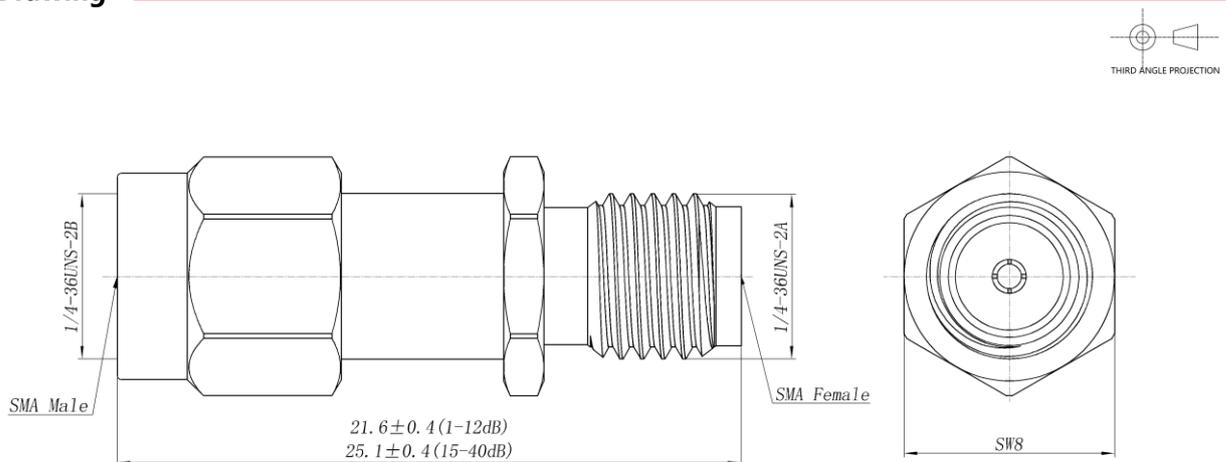

Fixed Attenuator

Model FA26-0203-SMSF Rev.A

DC-26.5GHz SMA Fixed Attenuator; 3dB; 2W;

Typical Graph

Typical test environment: 25°C and 60%RH

